

Accessories for measuring instruments ALMEMO® 2450, 2490, 2590 and output interface ZA 8006 RTA



Rubber safety holster, green
Rubber safety holster, gray
including carry strap

Order no.
ZB2490GS1
ZB2490GS2



Top hat rail mounting
1 battery compartment cap with top hat rail holder fitted,
including top hat

Order no.
ZB2490HS




Magnetic fastening
2 pot magnets, including 2 screws
(for battery compartment cap)

Order no.
ZB2490MH

General accessories

Batteries and Rechargeable Batteries

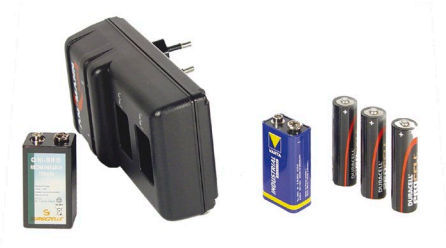

Types:	Order no.
9V battery (spare)	ZB2000B9
Charger, int. in connector incl. 9V bat.	ZB2000LS
9V rechargeable battery	ZB2000A9
AA battery, 1.5 V	ZB2000B1
AA NiMH rechargeable battery, 1.2 V, 1600 mA, coded for charging in ALMEMO® unit (e.g. ALMEMO® 2690-8)	ZB2000A1NM

Rechargeable batteries



Types	Order no.
Rechargeable battery, 12 V, 1600 mAh, NiMH with intelligent high-speed charging housed in case 174 x 29 x 137 mm (LxWXH) (without plug connections) voltage output via 3-pin socket	ZB5690AP
Connector mains unit, 100 to 240 VAC for charging the battery	ZB1212NA10
Connecting cable from battery to ALMEMO® device length = 1.5 meters, with ALMEMO® plug for ALMEMO® 2450, 2490, 2470, 2590-2/-3S/-4S, 2690	ZA1012AKA
With 3-pin bayonet coupling for ALMEMO® 5690, 8590, 8690	ZB5090EKA
With hollow connector for ALMEMO® 2890, 6290	ZB2290EKA

GPS mouse for determining position



Variants	Order no.
Fix for current location via GPS	
Measuring channels for latitude and longitude	
GPS mouse with cable and ALMEMO® connector	ZAD919GPS

Mains Adapter



Variants	Order no.
Switching power supply / connector variant	
100 to 240 VAC	
12 VDC, 2 A DIN hollow connector for ALMEMO® 2890-9, 6290-7B2	ZB1112NA10
12 VDC, 2 A ALMEMO® connector e.g. for hand-held devices ALMEMO® 2450, 2490, 2590, 2690, 710, 202	ZA1312NA10
12 VDC, 2 A 3-pin bayonet coupling e.g. for ALMEMO® 5690, 8590, 8690, 8036, 500	ZB1212NA10
12 VDC, 2 A With free ends	ZB1012NA10
Accessories	
Conversion connector for mains-powered devices Euro-plug to US standard (flat-pin)	ZB1000UA

DC Power Supply Cables



Supply cables for DC voltages

- Usage for car and electric fence batteries.
- For instruments that need to be supplied from the car battery.

Variants	Order no.
10 to 30 V DC, electrically isolated, with DIN hollow con- nector for ALMEMO® 2890-9, 6290-7B2 Output : 12V DC / 1 A (max.)	ZB2590UK
10 to 30 V DC, electrically isolated, with ALMEMO® con- nector for ALMEMO® 2450, 2490, 2590, 2690-8 710, 202 Output: 12 V DC / 250 mA (max.)	ZA2690UK
Output: 12 V DC / 1 A (max.)	ZA2690UK2
10 to 30VDC, electr. isol., with bayonet coupling for ALMEMO® 8590, 8036, 809 Output: 12VDC/250mA (max.)	ZB3090UK
10 to 30VDC, electr. isol., with bayonet coupling, for ALMEMO® 5690-9, 8690, 500 output: 12V DC / 1.25A (max.)	ZB3090UK2
Adapter cable with universal car connector	ZB1000AKU
New ALMEMO® power supply plug, 9 to 12 VDC, not electr. isolated, with clamp connector for ALMEMO® DC socket on hand-held devices ALMEMO® 2450, 2490, 2590, 2690, 710, 202	
Programming 0.2 A	ZA1312FS1
Programming 1 A	ZA1312FS8