

## Moisture Sensor FHA 696 MF



- Moisture sensor for determination of the moisture content in mineral construction materials, wood and cardboard.
- Indirect measurement of the moisture through the determination of the dielectric constant.
- Capacity measurement through a high frequency electromagnetic field, which penetrates the material in a non-destructive way.

### Technical Data

Measuring method:	capacitive	Measuring comb:	stainless spring steel 0.5mm, 70 x 35mm
Resolution:	0.1%	Weight:	260g
Measuring range (moisture):	0 to 50% moisture, referenced to mass	Nominal temperature:	15 to 25°C
Measuring range (material):		Operative range:	0 to +60°C
mineral construction materials	0 to 20%, moisture	Storage temperature:	-20 to +80°C
woods	0 to 50%, moisture	Signal output:	0 to 2V
paper and cardboard	0 to 20% moisture	Power supply:	+8 to +12V
Housing:	plastic handle with integrated electronics 40mm Ø, 130mm long	Current consumption	approx. 7 mA
Terminal block:	aluminium/plastic 20 x 25 x 70mm		

### Accessories

Test block for min. construct. materials	<b>Order no.</b> ZB9696PE05
Test block for wood, paper, cardboard	ZB9696PE30

### Type

Moisture sensor	<b>Order no.</b> FHA696MF
-----------------	------------------------------

## Wood moisture probe FHA 636 MF Hand-held probe for mobile test measurements



- Moisture sensor for determination of the moisture content in wood.
- Indirect moisture measurement according to the principle of conductivity.
- Determination of the moisture content in the material through the dependence of the electrical resistance on the moisture.

### Technical Data

Measuring method:	principle of conductivity	Reproducibility:	± 1%
Measuring range:	7 to 30 % moisture, referenced to mass	Nominal temperature:	23°C ±2°C
Housing:	plastic handle 40mm Ø, 130mm long	Operating temperature:	0 to +60°C
Measuring tips:	stainless steel, uninsulated 3mm Ø, 50mm long	Storage temperature:	-20 to +80°C
Weight:	260g	Signal output:	0 to 2V
		Power supply:	7.5 to +12V
		Current consumption	max. 10 mA

### Accessories

PTFE-insulated measuring tip - helps avoid measuring errors in the event of surface moisture, 1 piece (2 pieces are needed per probe)	<b>Order no.</b> ZB9636MFST
--	--------------------------------

### Type

Wood moisture probe	<b>Order no.</b> FHA636MF
---------------------	------------------------------

# Moisture in materials

## Moisture content sensor - for wood, for stationary measuring operations FHA696MFS1 Capacitive sensor for applying onto the wood's surface



- Moisture content sensor for comparative measurement of moisture in wood materials
- The capacitive sensor with the measuring electronics is completely integrated in the damp-proof sensor housing. Plug-in ALMEMO® connecting cable
- This device is designed for stationary installation and long-term monitoring e.g. of wooden parts of buildings, roof structures (with laminated beams).
- It is also suitable for data logger operation in energy-saving sleep mode (intermittent mode).
- The sensor housing is quick and easy to install on the wooden surface in question.
- The material's moisture content is measured indirectly by determining its dielectric constant, which is moisture-dependent (but not temperature-dependent).
- Its capacity is measured via a high-frequency electrical field which penetrates the wood without destroying it.
- The ALMEMO® device acquires the material's moisture content based on the linearization curve stored in the ALMEMO® plug.
- This measuring operation can be performed using any current ALMEMO® device (version 6 and above).

### Technical Data

Measuring method	capacitive	Housing	Plastic 51 x 53 x 36 mm (LxWxH)
Measuring range	0 to 50 % moisture percentage in wood with respect to total mass (at 23 °C)	Signal connection	Built-in plug
Resolution	0.1 % moisture content	Protection	Housing and plug connection IP64
Reproducibility	±1 % moisture content	ALMEMO® connecting cable	Coupling, PVC cable, 5 meters
Nominal temperature	23 °C ±2 K	ALMEMO® plug	Linearization for wood, stored in the ALMEMO® plug (for ALMEMO® devices version 6 and above)
Suitable conditions	0 to +80 °C Air humidity 0 to 90 % RH (no dew formation, no ice)	Supply voltage	via ALMEMO® plug (5 V)
Storage temperature	-20 to +80 °C	Current consumption	approx. 7 mA

### Accessories

Test block for wood, for testing purposes

### Order no.

ZB9696PE08

### Variants

Moisture content sensor for wood, sensor integrated in the sensor housing, with built-in plug, connecting cable 5 meters, ALMEMO® plug for current ALMEMO® devices, version 6 and above

### Order no.

FHA696MFS1

## Moisture content sensor - for wood, for stationary measuring operations **FHA636MFS1** Conductivity measurement with measuring tips that can be screwed into the wood Sensor with integrated temperature sensor for automatic temperature compensation



- Moisture content sensor for comparative measurement of moisture in wood materials
- Two hanger bolts are screwed into the wood surface and connected via measuring lines to the measuring electronics in the damp-proof sensor housing.
- The sensor housing with the integrated temperature sensor is also fixed in position on the wood surface.
- Plug-in ALMEMO® connecting cable
- This device is designed for stationary installation and long-term monitoring e.g. of wooden parts of buildings, roof structures (with laminated beams).
- Data logger operation in sleep mode (intermittent mode) is required in order to protect the wood from salinization or drying out.
- The material's moisture content is measured indirectly by determining its electrical conductivity, which is moisture-dependent.
- It is also temperature-dependent. However, the displayed moisture value is automatically temperature-compensated by means of an integrated temperature sensor.
- The ALMEMO® device acquires the material's moisture content based on the linearization curve stored in the ALMEMO® plug.
- This measuring operation can be performed using any current ALMEMO® device (version 6 and above).

### Technical Data

Measuring method	Electrical conductivity	Measuring lines	2 lines, PTFE-insulated, length = 0.5 meters with circular cable lugs 4 mm
Measuring range	5 to 50 % moisture percentage in wood with respect to total mass (at 23 °C)	Measuring tips	2 stainless-steel M4 hanger bolts Total length = 60 mm including 4 stainless-steel nuts, 4 stainless-steel lock washers
Resolution	0.2 % moisture content	Clearance	2.5 cm at right angles to the grain
Reproducibility	±1 % moisture content	Signal connection	Built-in plug
Nominal temperature	23 °C ±2 K	Protection	Housing, including connectors IP63
Temperature sensor	NTC, integrated in sensor housing	ALMEMO® connecting cable	Coupling, PVC cable, 5 meters
Temperature compensation	in range 0 to +80 °C	ALMEMO® plug	Linearization for wood, stored in the ALMEMO® plug (for ALMEMO® devices version 6 and above)
Suitable conditions	0 to +80 °C Air humidity 0 to 90 % RH (no dew formation, no ice)	Supply voltage	via ALMEMO® plug (5 V)
Storage temperature	-20 to +80 °C	Current consumption	approx. 5 mA
Housing	Plastic 51 x 53 x 36 mm (LxWxH)		
Measuring connection	2 built-in sockets, 4 mm, with transverse hole		

### Variants


Moisture content sensor for wood, with measuring tips, measuring line, sensor housing, connecting cable, 5 meters ALMEMO® plug, for current ALMEMO® devices, version 6 and above

### Order no.

**FHA636MFS1**

# Dew Point Detector, Water Detection Probe

## Dew Point Detector FHA 9461

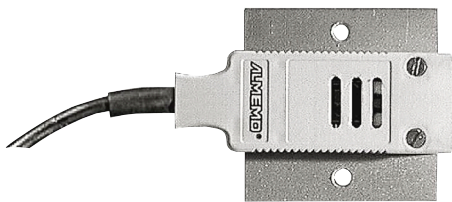

- Dew detector for determination of dew conditions.
- Consisting of one temperature sensor and an integrated sensor chip with CCC dew point sensor.
- Particularly suitable in building physics for control measurements and stationary installation.
- The dew point detector does not provide a measuring signal but a step function: dewed (100%) / no dew (0%).

### Technical Data

Principle of measurement:	CCC sensor	Signal output:	scaled voltage approx. 0 to 1V
Operative range:	0°C to +70°C (no ice formation, no saliferous atmosphere)	Current consumption:	approx. 3mA
Settling time:	final value after 2 to 60 seconds	Heat flow plate:	aluminium, 40 x 40mm
Temperature sensor:	NTC type N (10k at 25°C), accuracy: ±0.1°C (within operative range)	Storage temperature:	-10°C bis +70°C

### Types

Sensor and electronics integrated in ALMEMO® connector, mounted on heat conducting plate made of aluminium

### Order no.

FHA9461

## Water Detection Probe FHA 936 WD



- Water detection probe for instant detection of uncombined water.
- Particularly suitable for construction applications, especially in locations that are difficult to check visually, e.g. at sealing joints, under cement floors etc.
- Indirect moisture measurement according to the principle of conductivity.
- Probe with two collets for easy electrode replacements.
- Electrodes in three different designs for matching any required application.

### Technical Data

Measuring method:	detection of water	Weight:	260g
Meas. values:	<10% no water >10% water	Nominal temperature:	23°C ±2°C
Housing:	plastic handle 40mm Ø, 130mm long	Operating temperature:	0 to +60°C
Electrodes:	stainless steel	Storage temperature:	-20 to +80°C
Electrode types:	uninsulated with rounded tip: 200mm long, 3mm Ø uninsulated with sharp-edged tip: 50mm long, 3mm Ø spring steel strap: 200mm long, 6mm wide, 0.5mm high	Signal output:	ALMEMO® (approx. 0 to 2V)
		Power supply:	7.5 to 15V
		Current consumption	max. 10 mA

### Type

Water detection probe

### Order no.

FHA936WD